

Ground anchors

Thank you very much for choosing a Sport-Thieme product!

Please read the instructions fully before you assemble the equipment, so you can enjoy the product and s
We are happy to answer any questions you may have.

1. Scope of delivery


2x Ground anchor
2x Hexagon socket screw DIN 933, M10 x 140mm
2x Washer DIN 9021, Ø 10.5mm x 30mm




2. Installation

- a) Concrete anchor, thread facing upwards. The upper end of the anchor has to be flush with the upper edge of the flooring material.

Ground anchoring with welded plate:

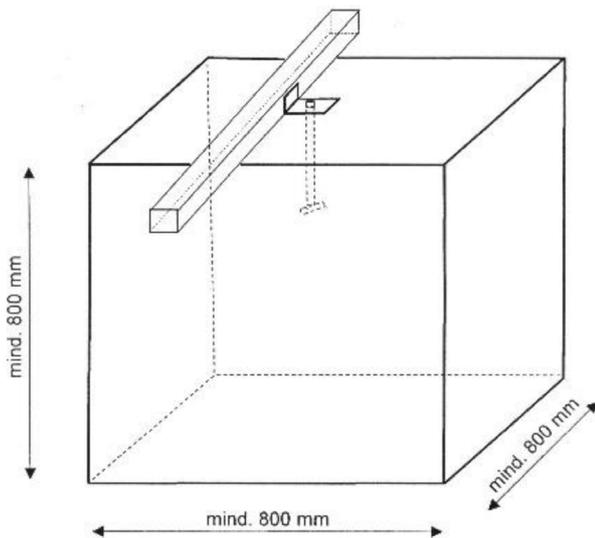

Ground anchoring at ground tube:

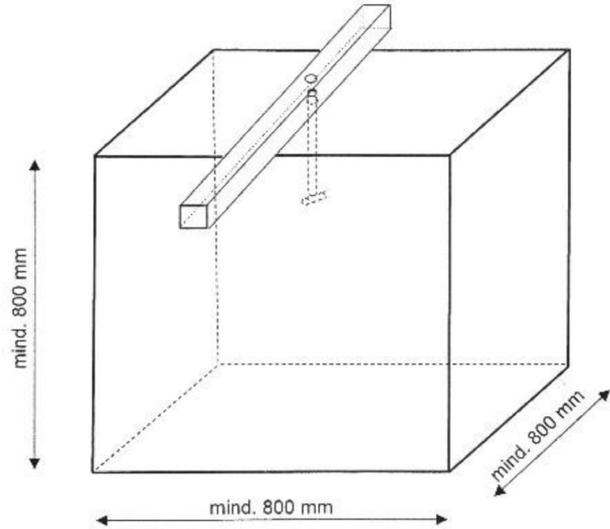

- b) For each ground anchoring we recommend foundations of at least 800 x 800mm, depth 800mm. Depending on size and execution of the goal as well as on local possibilities the foundations can be linked.
- c) Do not use an accelerating admixture or antifreeze as these may cause damages of the anchors and thus becoming a security risk.
- d) The number of necessary anchors and their positions refer to the equipment to be fixed (i.e. number of plates/fixing points at the goal and the distance between them).
- e) After setting of concrete place plate/fixing point of the goal upon the thread, add washer DIN 9021 Ø 10.5 x 30mm and machine screw DIN 933 M10 x 140 and tighten it with a socket wrench (not part of the delivery).